



CIRCOLO LED M
11403

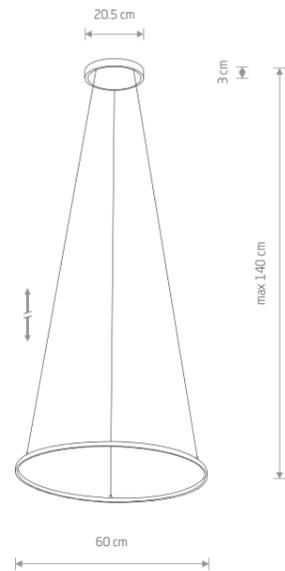

CIRCOLO LED M
painted aluminum, painted steel, plastic PC

■ 11403 3000K ■ 11604 3000K

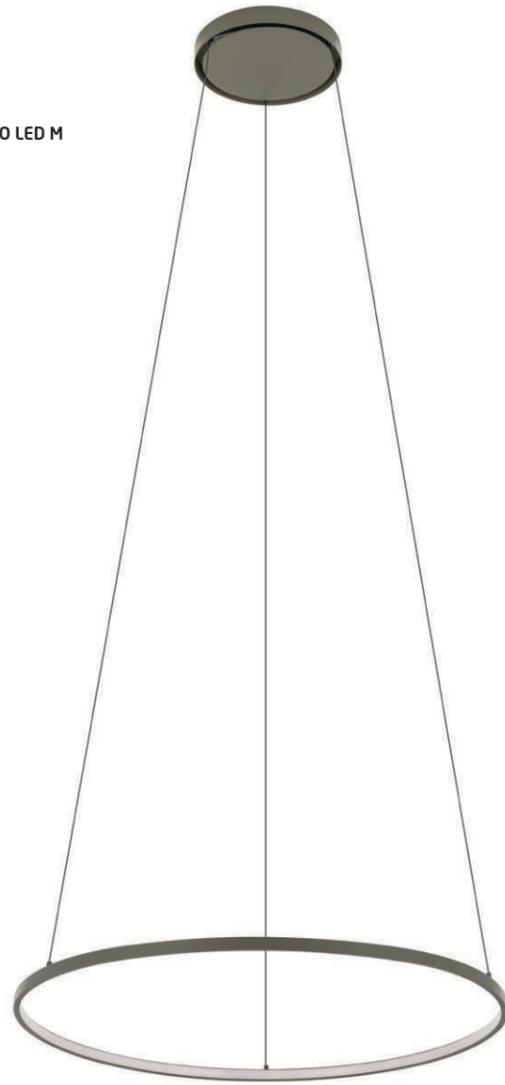


| Item No. | Power | Colour temp. | Luminous flux | Beam angle | Colour Rendering Index (CRI) | Input | Safety type | Power factor | Ingress protection | Lifetime |
|----------|---------|--------------|---------------|------------|------------------------------|----------------------|-------------|--------------|--------------------|----------|
| 11403 | 21W LED | 3000K | 660 lm | 70° | >90 | ~220-230 V, 50/60 Hz | ⊕ | >0.5 | IP20 | 30000h |
| 11604 | 21W LED | 3000K | 660 lm | 70° | >90 | ~220-230 V, 50/60 Hz | ⊕ | >0.5 | IP20 | 30000h |

■ SILK OLIVE P031 ■ WHITE P004 RAL 9003



CIRCOLO LED M
11605

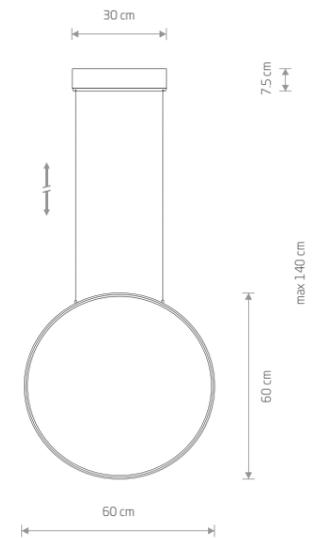

CIRCOLO LED M
painted aluminum, painted steel, plastic PC

■ 11401 3000K ■ 11605 3000K



| Item No. | Power | Colour temp. | Luminous flux | Beam angle | Colour Rendering Index (CRI) | Input | Safety type | Power factor | Ingress protection | Lifetime |
|----------|---------|--------------|---------------|------------|------------------------------|----------------------|-------------|--------------|--------------------|----------|
| 11401 | 21W LED | 3000K | 660 lm | 70° | >90 | ~220-230 V, 50/60 Hz | ⊕ | >0.5 | IP20 | 30000h |
| 11605 | 21W LED | 3000K | 660 lm | 70° | >90 | ~220-230 V, 50/60 Hz | ⊕ | >0.5 | IP20 | 30000h |

■ WHITE P004 RAL 9003 ■ SILK OLIVE P031